

PCT/IB 03/05623
28.11.03

REC'D 13 DEC 2003

WIPO

PCT

PA 1047192

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

August 04, 2003

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/475,166

FILING DATE: June 02, 2003

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS



N. Woodson
N. WOODSON
Certifying Officer

BEST AVAILABLE COPY

06/02/03
02527 U.S. PTO

Please type a plus sign (+) inside this box → **+**

60475166 060203

PTO/SB/16 (02-01)

Approved for use through 10/31/2002. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

Express Mail Label No. EV 335 816 605 US

Date of Deposit: 2 June 2003

INVENTOR(S)					
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)			
Geoffrey F. Krishna	Burns Vaidyanathan	Peaceable Ridge Road, Ridgefield, CT Koramangala, Bangalore, India			
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (280 characters max)					
DATAFLOW-SYNCHRONIZED EMBEDDED FIELD PROGRAMMABLE PROCESSOR ARRAY					
CORRESPONDENCE ADDRESS					
Direct all correspondence to:					
<input checked="" type="checkbox"/> Customer Number		24737		→ *24737*	
OR Type Customer Number here					
<input checked="" type="checkbox"/> Firm or Individual Name		PHILIPS ELECTRONICS NORTH AMERICA CORPORATION			
Address		580 WHITE PLAINS ROAD			
Address					
City	TARRYTOWN	State	NY	ZIP	10591
Country	USA	Telephone	(914) 333-9608	Fax	(914) 332-0615
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification Number of Pages		21		<input type="checkbox"/> CD(s), Number	
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets		3		<input type="checkbox"/> Other (specify)	
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)					
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.					
<input type="checkbox"/> A check or money order is enclosed to cover the filing fees					
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number: 14-1270					
FILING FEE AMOUNT (\$)					
160.00					
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,

SIGNATURE

Date

6/2/03

REGISTRATION NO.: 48,027

TYPED or PRINTED NAME

AARON WAXLER

(if appropriate)

Docket Number:

US020542

TELEPHONE

(914) 333-9608

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C., 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Alexandria, VA 22312-1450



60475166.060203

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Re Application of

Atty. Docket

GEOFFREY F. BURNS

US020542

Serial No.

Group Art Unit

Filed: CONCURRENTLY

Ex.

Title: DATAFLOW-SYNCHRONIZED EMBEDDED FIELD PROGRAMMABLE PROCESSOR
ARRAY

Honorable Commissioner of Patents and Trademarks
Alexandria, VA 22313-1450

AUTHORIZATION PURSUANT TO 37 CFR §1.136(a)(3)
AND TO CHARGE DEPOSIT ACCOUNT

Sir:

The Commissioner is hereby requested and authorized to treat any concurrent or future reply in this application requiring a petition for extension of time for its timely submission, as incorporating a petition for extension of time for the appropriate length of time.

Please charge any additional fees which may now or in the future be required in this application, including extension of time fees, but excluding the issue fee unless explicitly requested to do so, and credit any overpayment, to Deposit Account No. 14-1270.

Respectfully submitted,

By 

Aaron Waxler, Reg. 48,027
Patent Agent
(914) 333-9608

703366

DATAFLOW-SYNCHRONIZED EMBEDDED FIELD
PROGRAMMABLE PROCESSOR ARRAY

5 **CROSS-REFERENCE TO RELATED APPLICATION**

The present invention claims the benefit of commonly-owned, co-pending U.S. Provisional Patent Application Serial No.

10 60/432,971, Attorney Docket No. US020542P, filed Sep. 12, 2002, the entire disclosure of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

15 **Field of the Invention**

The present invention relates to array processors embedded in integrated circuits, such as those implemented in a semiconducting material like silicon, and
20 particularly to reconfigurable embedded array processors.

DISCUSSION OF THE PRIOR ART

An embedded system is some
25 combination of hardware or software that is specifically designed for a particular purpose or application within an overall system, and

may be fixed in capability or programmable. A mobile phone may, for example, have a power saving integrated circuit (IC) or "chip" operable only with its respective type of phone and devoted exclusively to controlling the display and other elements to conserve power.

The same mobile phone typically includes a digital signal processing integrated circuit, which executes the functions on a digital portion of the radio. In order to adapt to different and/or changing radio broadcast formats of an incoming signal, programmable radios would be desirable. However, digital radio processing functions can entail high data sample rates, along with high computational loads, that are typically impractical to implement on programmable hardware.

Embedded field programmable gate arrays (EFGAs) are "chip macros" that can be programmable in the field, as well as integrated in a silicon chip, and are available from a limited number of vendors. These special purpose processors operate at high speeds, minimize the amount of hardware required, and minimize software development programming time. Although EFGAs offer "post silicon" reconfigurability, their design density is poor and their clock speed is unpredictable, particularly for high speed demodulation functions in digital radios.

SUMMARY OF THE INVENTION

The present invention is directed to an embedded processor consisting of a two-
5 dimensional array of processing cells and a mechanism for reconfigurably connecting paths between a signal processing circuit and respective cells on a periphery of the array. The processor performs mathematical operations
10 under dataflow control, and is thereby easily integrated within a signal processing circuit operating under the same mode of control. According to this invention the signal processing behavior of the integrated circuit
15 may be reconfigured in the field.

BRIEF DESCRIPTION OF THE DRAWINGS

20 Details of the invention disclosed herein shall be described below, with the aid of the figures listed below, in which same or similar components are denoted by the same reference numbers over the several views:

25 FIG. 1 depicts an example of a device having an embedded array processor in accordance with the present invention; and

FIG. 2 depicts an exemplary flow of processing in controlling the array processor
30 of FIG. 1; and

FIG. 3 depicts an example of a mixed-signal system on a chip using an embedded array processor according to the present invention.

5

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 shows an exemplary embodiment of an apparatus in accordance with the present invention. A receiver 100, such as one in a broadcast or cable television receiver, local area network wireless receiver or mobile phone receiver, contains an IC 102. The IC 102 includes a system controller 104 and an embedded array processor 106. An array processor is a processor capable of executing instructions that operate on input that may consist of arrays. The embedded array processor 106 has a two-dimensional rectangular array 108 and a mechanism or interface 110 which is shown in FIG. 1 to surround the array 108 on all four edges. The two-dimensional array 108 is composed of processing cells 112.

Preferably, inter-cell connection within the array 108 is such that each cell 112 is connected only to cells 112 whose column is the same and whose row is immediately adjacent, and only to cells 112 whose row is the same and whose column is immediately adjacent, to realize a "nearest neighbor" connection architecture, as shown in FIG. 2 of commonly

owned U.S. Patent Publication No. 2003/0065904,
filed October 1, 2001, (hereinafter the '904
application), the entire disclosure of which is
incorporated herein by reference. Since inter-
5 cell connection is purely nearest-neighbor, the
array offers the flexibility of being scalable.

The interface 110 has border cells
114 connected to each respective processing
cell 112 on the periphery of the array 108,
10 each border cell 114 having a buffer 116. The
periphery preferably consists of those
processing cells 112 which are located on the
array edges, i.e., in at least one of the first
row, last row, first column and last column.
15 Since internal array connection cell-to-cell,
under the nearest neighbor scheme, leaves two
neighbors missing for each corner cell 112 and
one neighbor missing for each other cell 112 on
array edges, the missing connections are each
20 made to a corresponding border cell 114.

Further included in the interface 110
are input/output (I/O) pads 118, one for each
border cell 114, and a crossbar network 120 for
reconfigurably connecting each I/O pad 118 one-
25 to-one to a corresponding border cell 114. For
each such connection an information path is
formed. FIG. 1 shows an information path 122
that includes an I/O pad 118 the crossbar
network 120 and a border cell 114.

30 Reconfiguring a path causes the path to
traverse either a different border cell 114, a
different I/O pad 118, or both. The path 124

is a reconfiguration of the path 112 to
traverse a different border cell 114.

In a preferred embodiment, the array
processor 106 is a systolic processing array, a
5 special-purpose system which can be likened to
an assembly line for input operands, although
operations typically proceed not in a strictly
linear direction but in changing directions.
In a two-dimensional array of processing cells,
10 differing mathematical operations are performed
on the data by different cells, while data
proceeds in an orderly, lock-step progression
from one cell to another. An example of a
systolic array would be one that multiplies
15 matrices. Entries of a row are multiplied by
corresponding entries of a column, and the
products are summed to produce an ordered
column of sums. Efficiency is achieved by
arranging operations to be performed in
20 parallel, so that the results are produced in
the fewest clock cycles. The '904 application
provides another example of a systolic
processing array, implementing a 32-tap real
finite impulse response (FIR) filter. The
25 filter is enhanced by concatenating other
levels, two-dimensional and otherwise, to the
original two-dimensional array, border cells
being connected to processing cells on the
periphery of each level. Such an enhanced
30 array, connected by the border cells 114, is
also within the intended scope of the present
invention.

In one embodiment, the border cells 114 not only provide input to the array 108. They also provide results of array processing to the I/O pads 118. The border cells 114
5 receive these results by neighbor to neighbor conveyance from the processing cells 112 producing the results. Optionally, the border cell 114 may validate the results and output a data valid signal to the external process.

10 In a preferred embodiment, the IC 102 includes a memory from which array programs are downloaded by means of a bus to corresponding processing cells 112. The memory is preferably a random access memory (RAM) or other writeable
15 storage device so that updated array programs can be provided, as by an array generator external to the receiver 100.

The system controller 104 passes array programs to a master cell 126 of the
20 embedded array processor 106 over a configuration bus such as the random access configuration bus shown in FIG. 16 of the '904 application. Referring to FIG. 2, the master cell 126 forwards the array programs to the
25 appropriate processing cells 112 (step 202) at system initialization or upon reconfiguration, e.g. implementation of a new algorithm for the processing array 106 (step 204). Due to the parallelism inherent in systolic processing,
30 some of the processing cells 112 may receive identical programs. Alternatively implemented,

the system controller 104 and RAM may instead reside within the embedded array processor 106.

Further depicted in FIG. 2 is an exemplary dataflow into the array 108. When a
5 new operand is received on an I/O pad 118, it continues flowing over a path that the crossbar network 120 directs to a corresponding border cell 114 (step 206) which checks the operand for validity (step 208). If invalid, error
10 processing ensues (step 212), which may involve notifying a user of the receiver 100, and a new operand is requested 216 from the IC application using the embedded array processor 106 (step 216). Alternatively, forward error
15 correction techniques may be applied to rectify the faulty operand. As a further alternative, validation may be performed further upstream, before buffering by the border cell 114. In the embodiment shown in FIG. 2, a valid operand
20 is added to buffer 116 (step 214) and a counter (not shown) is incremented (step 216). Preferably, the buffer cell 116 is implemented to stall the processor providing the new operand when the buffer 116 is full, as by
25 issuing a stall instruction that is routed over the corresponding I/O pad 128 to that processor. A resume instruction is subsequently issued to the processor when an operand is de-buffered. Alternatively, enough
30 buffer space may be provided at the outset to insure that the inflow of new operands is accommodated. In step 218, a parameter

corresponding to a predetermined number of
input operands is compared to the buffer count.
The parameters may vary among border cells 114
and are preferably programmable. The buffers,
5 e.g. ring or circular buffers, are implemented
preferably in software. Alternatively, simple
first in/first out (FIFO) buffers may be
employed.

If the buffer count is greater or
10 equal to the parameter, a trigger is actuated,
e.g. the border cell 114 signals the master
cell 126 (step 220). If the buffer count is
instead less than the parameter control returns
to the top of the loop (step 206), and a new
15 operand is awaited.

When an operand is read from the
buffer for use by the array 108 (step 222), the
counter is decremented (step 224).

The master cell 126, described above
20 regarding its role of distributing downloaded
array programs, has the additional role of
directing array operations based on the inflow
of operands. A new operation to be performed
on the array 108, or a new stage of a current
25 operation, may require buffered input operands.
When the processing cells 112 needed are idle
(step 226), the master cell 126 checks if it
has received triggers from all active border
cells 114, i.e. the border cells immediately
30 adjacent those of the needed processing cells
on the array periphery (step 228). If all of
the triggers have been received, or when this

occurs, the operands are read from buffer, the new operation or stage is commenced and the triggers are reset (step 230).

In accordance with the above-
5 described border and master cell protocol, the array processor 106 performs mathematical operations whose timing is based on a flow of input operands along the paths providing the operands to the array 108.

10 In a preferred embodiment, the parameter for step 218 is set to zero. In effect, a Kahn process network is therefore implemented. In such a network the processors are interconnected by channels having first-
15 in/first-out (FIFO) buffers. A processor can either send data to a FIFO channel, or else receive data from a FIFO channel. If a processor requests a read and no data is available then the processor stalls until the
20 data is available. In a pure Kahn process network enough buffer space is provided to accommodate an unlimited number of write operations. In the current implementation, writes are preferably limited so that if a
25 processor writes to a FIFO channel and it is full then the processor stalls until there is room to write.

As one example of the current invention, other processors on the IC 102 may,
30 along with the embedded array processor 106, form a Kahn process network with bounded writes, i.e. writes that are stalled when the

buffer is full. The buffers 114 are each implemented as a pair of FIFOs.

In this preferred embodiment, step 216 can be retained to detect when the buffer 114 is full, at which point a stall instruction as described above is preferably issued to the processor providing the input operands. If step 216 is retained, the counter decrementing process (steps 222, 224) for the border cells would be retained as well, and a resume instruction would issue when an operand is de-buffered.

Array programs may be prepared using a graphical user interface (GUI) that can edit and show the code to be downloaded to RAM on the IC 102 and then to each programming cell 112.

The embedded array processor 106 is particularly useful for integration, in a manner similar to that of embedding an FPGA within a system on chip (SoC). The border cell-based interface 110 affords simple integration and a simple software programming flow in place of the proprietary hardware design flow characteristics of EFPGAs.

As illustratively depicted in FIG. 3, the embedded array processor 106 may be integrated with a general system on a chip 102 that includes a digital circuit 302 and possibly an analog circuit 304, in order to introduce reconfigurability within the system. The digital circuit may be composed of fixed

design, digital circuit modules 306. One of the modules 306 may act as the system controller 104. The modules 306 have pins interconnected by routing switches 308, which
5 normally connect the outputs of one digital circuit module 306 to the input of another. The routing switches 308 are also capable of replacing the connection between two modules 306 with an alternative input and output
10 connector pair 310 to switch connection from one or both of the two modules 306 to a respective pin 128 of the embedded array processor 106. The digital circuit may also be integrated with the analog circuit 304 using
15 one or more analog-to-digital converters 314 to convert the analog signals from the analog circuit outputs 304 to digital signals to be connected routed to the digital circuit modules 306. In a similar way digital circuit outputs
20 to the analog circuit 304 may be converted from digital samples to analog signals by a digital-to-analog converter 316. A routing switch 318 may also be placed between the converter 314 and the digital circuit 302 in order to afford
25 switchable connection from and to the processor 106. In particular, the input/output connector pair 320 affords switching between a signal pathway from the analog circuit to the digital circuit and a signal pathway to or from said
30 one or more input/output pads. Similarly, a routing switch 322 may be placed between the digital-to-analog converter 316 and the digital

circuit 302. The routing switches 308, 318, 322 in combination with the reconfigurable interface 110 of the processor 106 provide the analog and digital circuits 302, 304 with one
5 or more dataflow-driven signal processing functions into the array processor 307 and insert such functions into either the chain of the digital circuit. In a similar fashion it is possible to program a dataflow-driven signal
10 processing function into the array processor 307 and insert such functions into the analog circuit 301. As seen in FIG. 3, the processor array 106 may interface with a plurality of inhomogeneous parallel processing elements on a
15 chip. The intended scope of the invention is not limited to the configuration shown and may include, for example, alternative and/or additional connections among the integrated circuit elements.

20 While there have been shown and described what are considered to be preferred embodiments of the invention, it will, of course, be understood that various modifications and changes in form or detail
25 could readily be made without departing from the spirit of the invention. For example, reconfigurable routing can be accomplished via a local selection mechanism in each border cell, rather than by a crossbar network. It is
30 therefore intended that the invention be not limited to the exact forms described and illustrated, but should be constructed to cover

60475166.060203

all modifications that may fall within the
scope of the appended claims.

WHAT IS CLAIMED IS:

1. A processor on an integrated circuit, the processor having a two-dimensional array of processing cells and a mechanism for reconfigurably connecting a plurality of paths to the array to respective cells on a periphery of the array, the processor performing mathematical operations whose timing is based on a flow of input operands along the paths.
2. The processor of claim 1, wherein the array comprises a systolic processing array.
3. The processor of claim 1, wherein the integrated circuit further comprises an analog circuit in communicative connection with said processor.
4. A receiver comprising the integrated circuit of claim 3.
5. The processor of claim 1, wherein inter-cell connection within the array is such that each cell of the array is connected only to cells whose column is the same and whose row

is immediately adjacent, and only to cells whose row is the same and whose column is immediately adjacent.

6. The processor of claim 1, further comprising an input/output pad of the processor along each of the plural paths.

7. The processor of claim 1, further comprising one or more input/output pads of the processor along respective ones of the paths, wherein the integrated circuit includes in communicative connection with said processor an analog circuit, a digital circuit and an analog-to-digital converter connected to the digital circuit by a reconfigurable switch configured to switch between a signal pathway from the analog circuit to the digital circuit and a signal pathway to or from said one or more input/output pads.

8. The processor of claim 1, wherein each path traverses a border cell connected to a corresponding one of said respective cells so

that the reconfiguring of a path causes the path to traverse at least one of a different border cell and a different I/O pad.

9. The processor of claim 8, further including an input/output pad along each path.

10. The processor of claim 1, wherein the mechanism comprises a crossbar network.

11. The processor of claim 1, wherein the paths are connected one-to-one with said respective cells.

12. The processor of claim 11, wherein said input operands are buffered on their respective paths before arrival at the array, said performing not commencing before a corresponding predetermined number of operands is buffered for each respective path of a predefined subset of the paths, said number being one or greater.

13. The processor of claim 11, wherein said input operands are buffered on their respective paths before arrival at the array, said performing not commencing before a corresponding predetermined number of operands that have been buffered for each respective path of a predefined subset of the paths have been found to be valid, said number being greater than one.

14. The processor of claim 13, further including a bus to which the array cells are connected and by means of which the array cells are programmable.

15. The processor of claim 14, further comprising on the bus a master cell for reprogramming the array cells.

16. The processor of claim 15, wherein said master cell commences said performing.

17. The processor of claim 1, further including a bus to which the array cells are

connected and by means of which the array cells are programmable.

18. The processor of claim 1, including an array processor that comprises said two-dimensional array.

19. The processor of claim 1, wherein said array is rectangular and said periphery consists of those of said processing cells located in at least one of a first row, last row, first column and last column of said array.

20. The processor of claim 1, wherein the paths include first-in/first-out (FIFO) buffers that are configured in a Kahn process network implemented to stall a process from writing to a buffer of said buffers if the buffer is full.

21. A method comprising the steps of:
providing on an integrated circuit a
processor having a two-dimensional array of
processing cells and a mechanism for
reconfigurably connecting a plurality of paths
to the array to respective cells on a periphery
of the array; and

utilizing the processor to perform
mathematical operations whose timing is based
on a flow of input operands along the paths.

ABSTRACT OF THE DISCLOSURE

An embedded field programmable processor includes a two-dimensional array of processing cells for performing mathematical operations
5 whose timing depends on the inflow of operands. An array interface reconfigurably connects paths for the inflow to respective cells on the array periphery. The array is preferably of the systolic type and is preferably implemented
10 with nearest neighbor inter-cell connections.

100

RECEIVER

102

IC

SYSTEM CONTROLLER 104

106

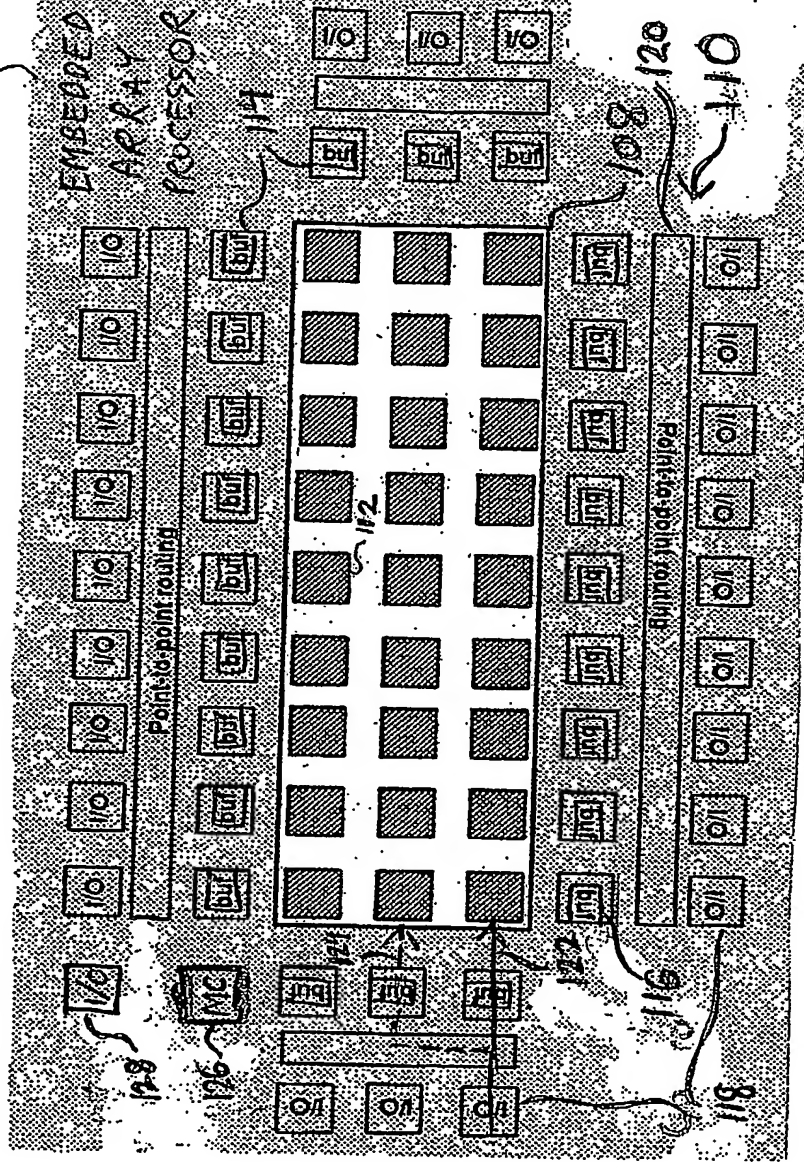


FIG. 1


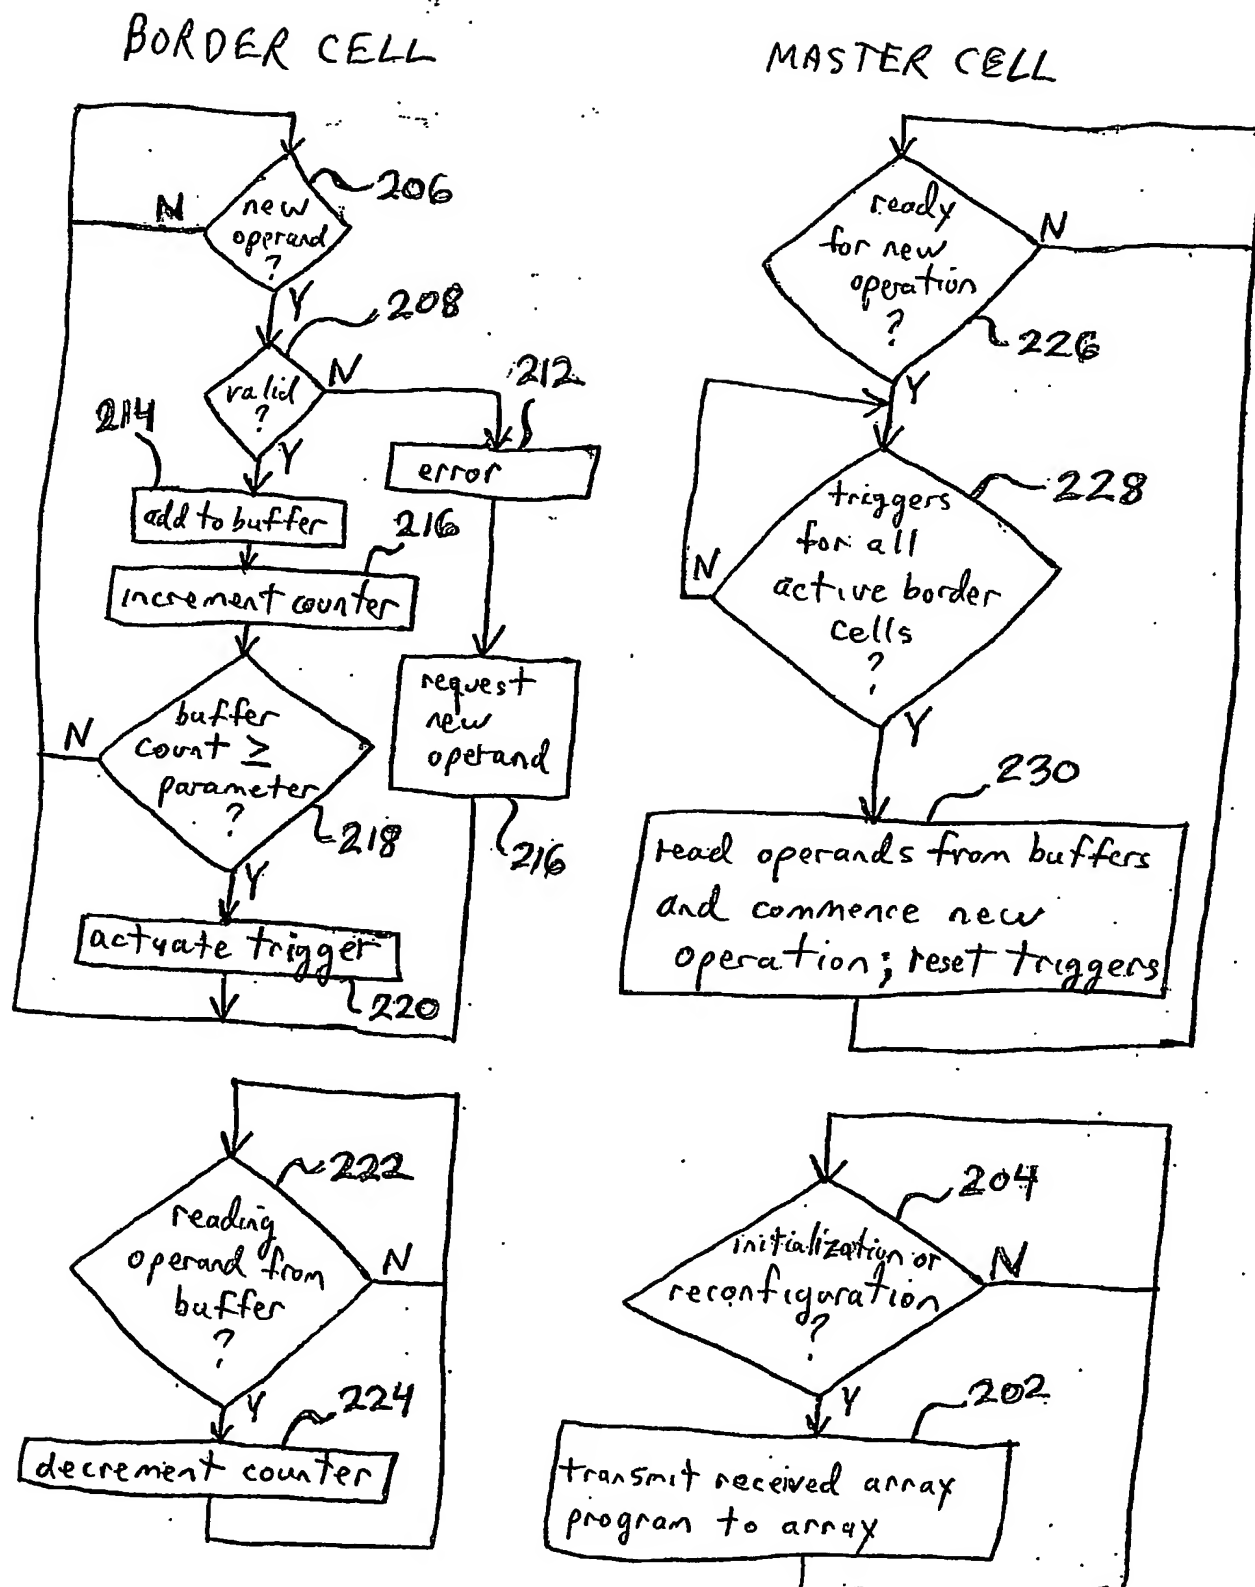


FIG. 3

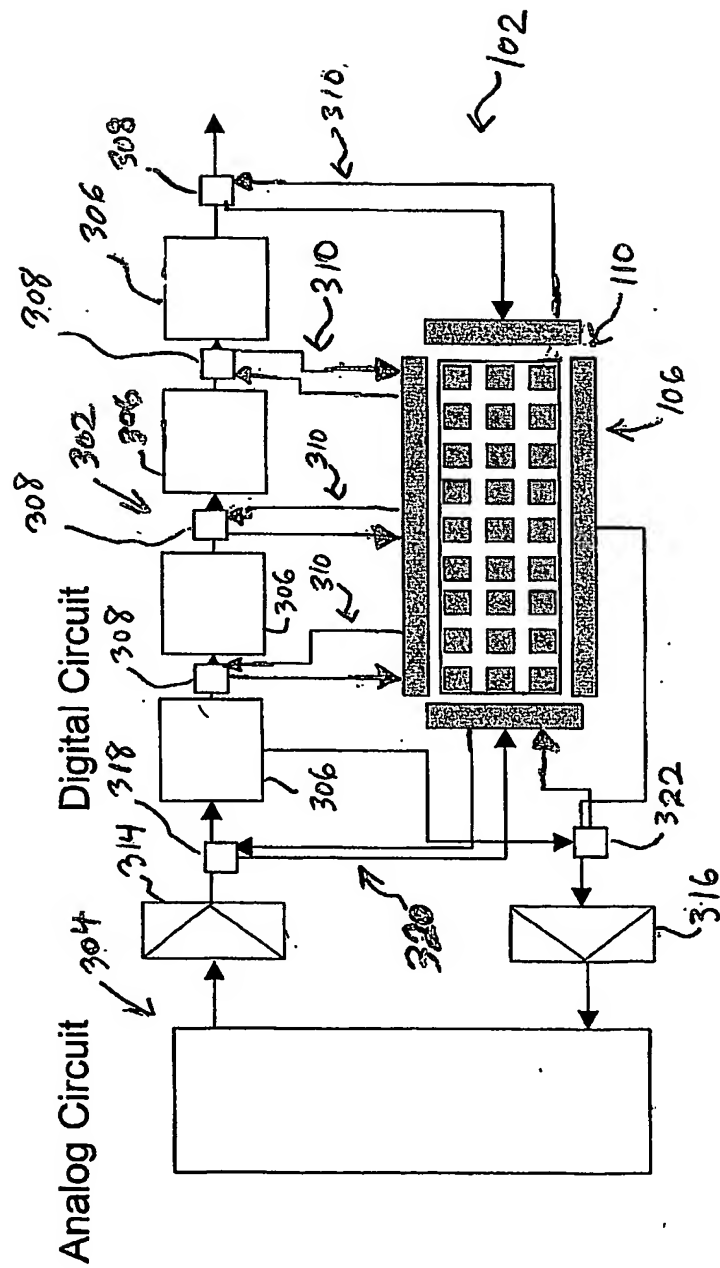

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.